




User Manual

ds841LR4

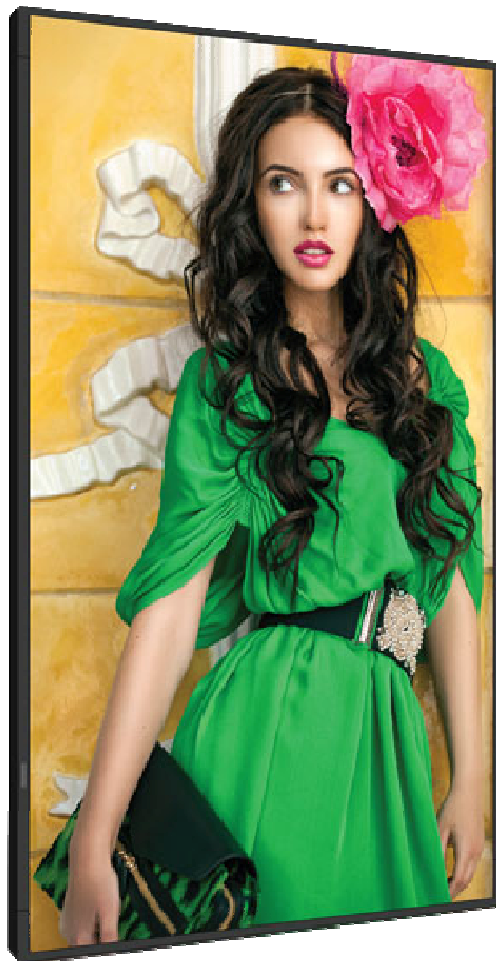

DynaScan

Version 1.00

The use of diagrams and illustrations in the manual for reference only, actual product may be different.


Product design and specifications are subject to change without notice


Contents


| | |
|--|----|
| Safety Precautions..... | 3 |
| Important Safety Information | 4 |
| Declaration of Conformity | 6 |
| Getting Started..... | 7 |
| Contents..... | 7 |
| Installing and Replacing Remote Control Batteries | 8 |
| Installation..... | 9 |
| Mounting | 9 |
| Connecting To a Power Source..... | 13 |
| Connecting an External Video Source..... | 13 |
| Connecting Multiple Displays for Video Wall Applications | 14 |
| Connector Positions..... | 15 |
| Input / Output Terminals | 16 |
| Operating Instructions..... | 17 |
| Powering On/Off the Display | 17 |
| Using the Remote Control | 17 |
| Using the Rear Panel Controls | 20 |
| Navigating the On Screen Display (OSD) Menu | 21 |
| Specifications..... | 24 |
| Input Mode | 25 |
| Pin Assignments | 26 |
| Digital RGB Output (DVI-D): DVI | 26 |

| | |
|---------------------------------------|----|
| Digital RGB Input (DVI-D): DVI..... | 26 |
| RS-232 Output..... | 27 |
| RS-232 Input..... | 27 |
| Troubleshooting..... | 28 |
| Recycling and Energy Information..... | 29 |
| Material Contents Declaration..... | 30 |
| Limited Warranty..... | 31 |

Safety Precautions

| CAUTION | |
|---|--|
|  | Do not install display in a wet environment or place anything on the top of the display filled with liquid, such as vase or beverage. |
| | Do not install near flammable objects, such as gasoline or other volatile liquids. |
| | Do not install near any heat sources such as radiators or other heating devices. |
| | Do not install in the dusty environment. |
| | Do not damage the power cord or plug. |
| | Do not disassemble the screen to avoid electric shock. |
| | The product can normally operate only under 2000m in altitude. In installations at altitudes above 2000m, some abnormalities may be experienced. |

| WARNING | |
|---|--|
|  | After extended use the heat sink behind the screen may be hot. Do not touch to avoid being burned. |
| | Do not touch the screen panel with sharp objects or extreme pressure to avoid damage to the panel. |
| | The display should be installed in well-ventilated place, do not install in a confined space. |
| | Do not drop or allow any object to fall to the screen. |
| | Do not touch the screen with wet hands to avoid electric shock. |
| | When cleaning, unplug the monitor. Use a soft, dry cloth to wipe the screen off. Do not use alcohol or other chemical liquids. |
| | If you smell smoke or hear a strange noise, immediately unplug the monitor and contact the vendor. |
| | Do not discard this product with general household waste. Please be sure to comply with the local waste regulations. |
| | Suitable for mounting on concrete or other non-combustible surface only. |

| IMAGE BURN-IN WARNING | |
|---|---|
|  | When a stationary or fixed image is displayed for a long time on the screen, the image may be permanently imprinted on the screen. This phenomenon is known as image burn-in and is not covered by the manufacturer's warranty. |
| | In order to avoid burn in, avoid prolonged display of static or fixed images on the screen. |

Important Safety Information

- Disassembling the LCD is strictly prohibited. Opening the cover may expose the user to shock or other hazards. Please contact DynaScan certified service professionals for all maintenance requirements.
- Do not allow any liquid to enter the LCD. Also avoid placing the LCD close to water sources.
- Do not place heavy objects on the power cord. A damaged power cord might cause electric shock or fire.
- Do not bend, curl, or damage the power cord.
- The power cord must comply with local safety regulations.
- Do not damage or modify the prongs/pins and the ground contact on the power plug.
- Do not place the LCD on an unlevelled surface or an unstable vehicle. The LCD could fall over and cause substantial damage.
- Do not cover the vents and/or the heat sink.
- Do not install the LCD beside radiators or other heat sources. The installation site should have sufficient ventilation so the heat generated by the LCD can be dissipated.
- Do not use the Signage in a hot, humid, dusty, or fummy environment.
- Handle the LCD with care. Save the packaging materials for the next transport.
- Please clean the backside of the LCD at least once a month for dust and other particles.

Unplug the LCD immediately and contact a DynaScan certified service professional as soon as possible when any of the following situations occurs:

- Damaged power cord or power plug.
- If liquid or foreign objects has entered the LCD.
- If the LCD has been exposed to rain or water.
- If the LCD has been dropped or the casing has become damaged.
- If you notice any structural damage such as cracks, or unnatural vibration.
- If the LCD cannot be operated following the steps outlined in this manual.
- If the LCD emits smoke or other odors, or generates strange noises.

Operating Suggestions

- Avoid displaying a stationary image for a long period of time in order to prevent image sticking.

Cleaning the Panel

- Use a soft, lint-free cloth to gently wipe dust off the screen panel.
- Do not use any hard material to wipe the panel.
- Do not poke the panel with your hand or any sharp object (such as a pen or a nail) or exert excessive pressure to the panel to prevent damage to the panel.
- Do not use any cleaning solution on the panel as it might cause discoloration.

Cleaning the Casing

- Unplug the power cord.
- Gently wipe the casing with a soft cloth.

Attention

- Do not use any of the following solutions to clean the casing as they may damage the paint and cause it to crack or peel: benzene solution, alkaline solution, alcohol-based cleaning solution, glass cleaner, wax, polisher, or detergent.

Declaration of Conformity

FCC Verification

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Information

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

| Declaration of the Manufacturer |
|--|
| <p>We hereby certify that the Professional LCD DS841LR4 is in compliance with</p> <p>Low Voltage Directive 2006/95/EC</p> <p>Electromagnetic Compatibility Directive 2004 /108 /EC</p> <ul style="list-style-type: none">IEC 60950-1:2005 (2nd Edition) +Am1:2009EN 60950-1:2006+A11:2009+Am1:2010+A12:2011EN 61000-3-2:2006+A1:2009+A2:2009EN 61000-3-3:2008EN 55024:2010EN 61000-4-2:2009EN 61000-4-3:2006+A1:2008+A2:2010EN 61000-4-4:2012EN 61000-4-5:2006EN 61000-4-6:2009EN 61000-4-11:2004 <div style="text-align: right;"> DynaScan Technology, Inc.</div> |





Getting Started

Contents

Confirm the accessories below are included with the display. If any item is missing, please contact your dealer. The color and shape of the accessories may vary by product.

- DS841LR4 Professional LCD
- Remote Control x1 pcs
- Batteries (1.5V / AAA) x2 pcs
- Quick Start Guide x1 pcs
- Power cable x1 pcs
- RS-232 cable x1 pcs
- DVI cable x1 pcs
- CD-ROM x1 pcs
- Ethernet crossover cable x1 pcs

Attention: Please use the following table to check whether the included power cord is suitable for your region. If the power cord does not match your region, please contact your local supplier. Please use matching AC socket in order to meet local safety regulations.

| Plug Type | North America | European Continental |
|------------|---|---|
| Plug Shape |  |  |
| Region | U.S.A. / Canada | EU (Except U.K.) |
| Voltage | 220V | 230V |

Installing and Replacing Remote Control Batteries

1. Open the battery compartment cover.
2. Insert 2 new AAA batteries.
3. Close the battery compartment cover.

Warning:

- Incorrect usage of batteries may cause leakage or explosion.
- Pay attention to the polarity when installing batteries.
- Do not use batteries from different brands together. Do not mix new and used batteries. Doing so may shorten the battery life or cause leakage.
- Remove the batteries or replace them with a new pair when the batteries are depleted in order to prevent battery leak in the battery compartment.
- Do not touch the leaked substance from the batteries in case of a battery leak. Doing so may damage human skin.

Note: if you plan on not using the remote control for a long period of time, we recommend removing the batteries from the remote control.

Installation

The LCD must be properly installed using a wall mount. Incorrect installation may cause injury or damage the equipment. Product warranty does not cover damages caused by improper installation and DynaScan shall not be held responsible in such incident.

Mounting

- Hanging the Professional LCD from the ceiling or mounting it on the wall is the responsibility of the user. Not all ceilings or walls provide enough strength to support the LCD. The LCD may drop and cause serious injury if it is hanging from the ceiling with insufficient support or is mounted on a slanted wall. Product warranty does not cover improper installation, modification, or damages caused by natural disasters. DynaScan recommends hiring certified professionals to evaluate the installation site and mounting operation.
- Do not to cover the vent and/or the heat sink in order to ensure proper heat dissipation.
- Refer to the installation guide provided by manufacturer of the mount for proper installation.


When mounting on a wall or hanging from a ceiling

- A wall mount is not included in the accessory. Please purchase a VESA Standard wall mount to secure the LCD. DynaScan is not responsible for damages caused by using non-standard wall mounts.
- Verify that the mounting location can support the weight of the LCD before installation.
- The installation angle must be within 15 degrees of the vertical axis.
- Do not install the wall mount while the power is turned on as it may cause serious injury from electrical shock.

| Model Number | VESA (mm) | | Screw specification | Screw Length | Number |
|--------------|-----------|------------|---------------------|--|--------|
| DS841LR4 | (A * C) | 400 * 400 | M6 | Greater than 10mm (not including wall mount thickness) | 8 |
| | (B * C) | 1000 * 400 | | | |

DS841LR4

Unit: $\frac{\text{mm}}{\text{inch}}$

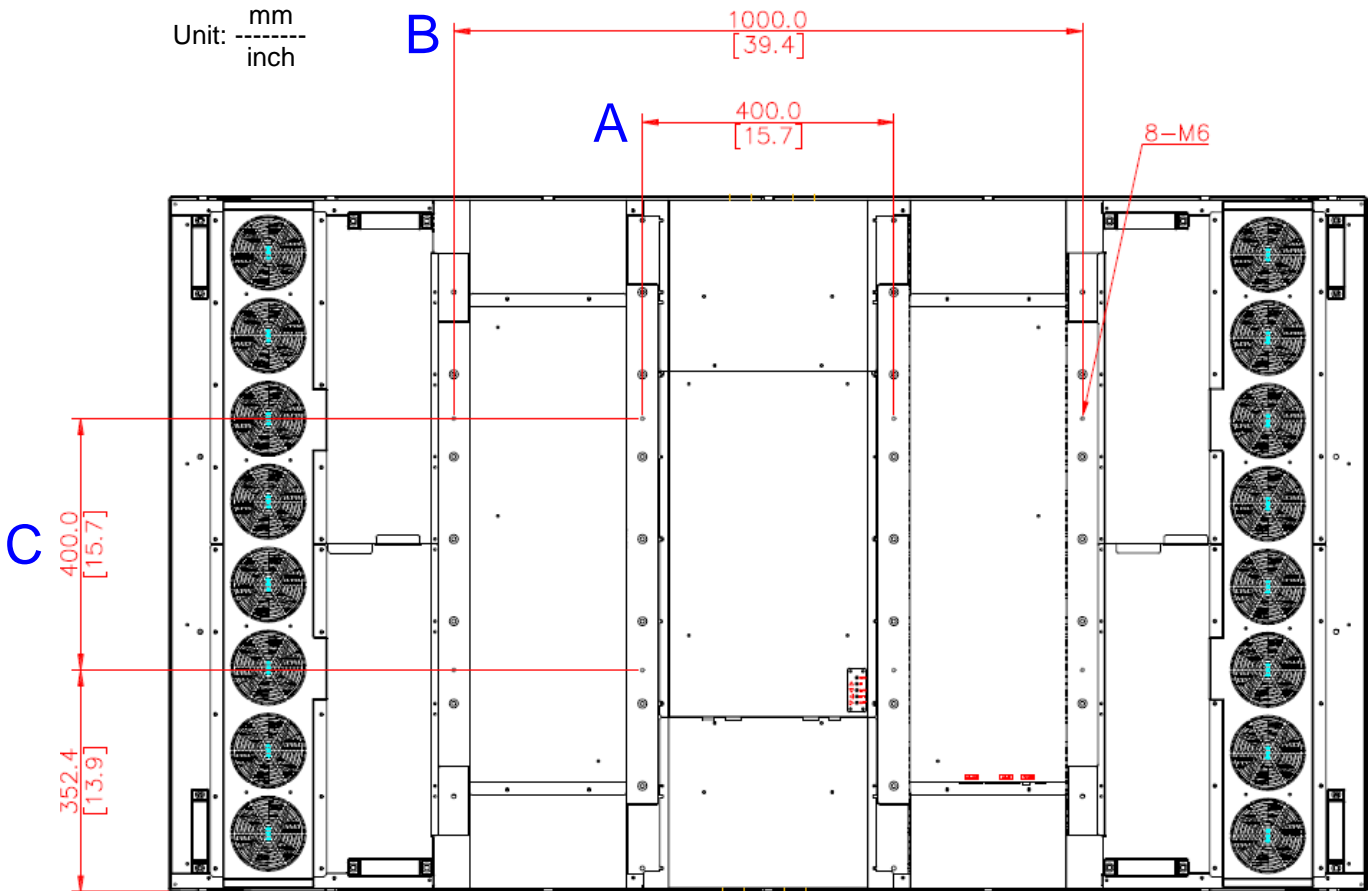


Orientation

- When used in the portrait orientation, the LCD should be rotated clockwise such that the left edge becomes the top edge.



Installation Location

- The ceiling or the wall must have enough strength to support the LCD and its accessories.
- Do not install in a location with strong vibrations or is dusty.
- Do not install near the building's main electric panel.
- Do not install at a location where the LCD can be easily removed by the general public.
- When installed in an alcove, leave at least 10cm (4") of space around the LCD to ensure proper ventilation.

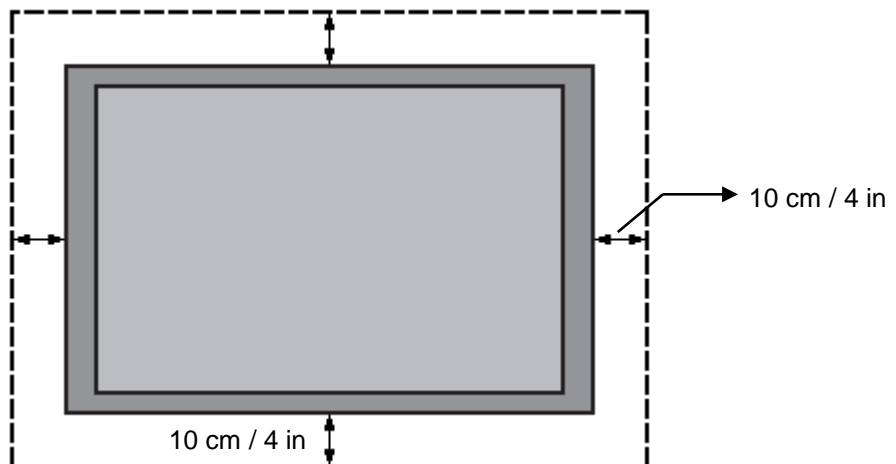

When hanging from a ceiling


- Ensure that the ceiling is strong enough to support the LCD and its accessories. Also consider the effects of earthquake, unexpected vibration, and other external forces when evaluating the ceiling strength.
- The LCD should be secured to the building's structural frame, such as a beam, and not to materials such as light steel frame or interior decoration.
- Do not use wood screws or dry wall anchors for installation.

Maintenance

- Inspect the fasteners regularly for signs of loosening or deformation. Please perform appropriate corrective measures when a problem is identified. Neglecting the problem may worsen the situation.
- Increase the inspection frequency on areas where previous maintenance had occurred to ensure the problems do not occur again.


Connecting To a Power Source

Using the power cable provided, insert the female connector into the back of the display shown the in the diagram below. Connect the male end of the power cable to a 200-240 volt, 50 / 60Hz AC power outlet. Insert the plug completely into the socket. A loose power connection may cause degradation to the image quality.

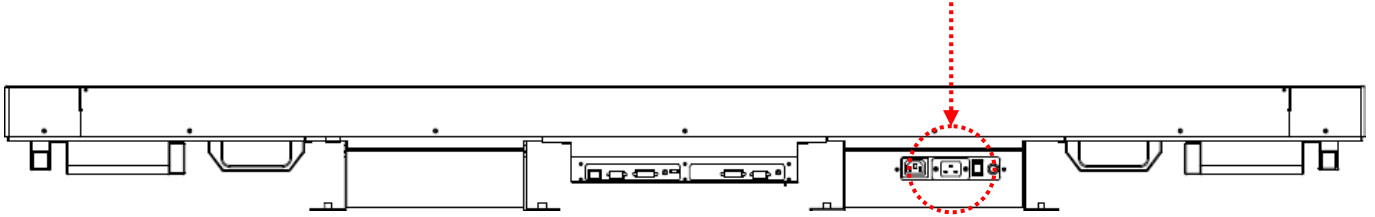

Connecting an External Video Source


Turn OFF the power to both the LCD and the external video device. Using the DVI cable provided, insert one end into the DVI-IN on the back of the display shown the in the diagram below. Connect the other end of the DVI cable to the DVI output of the video source. Refer to your video device's product manual for additional information.

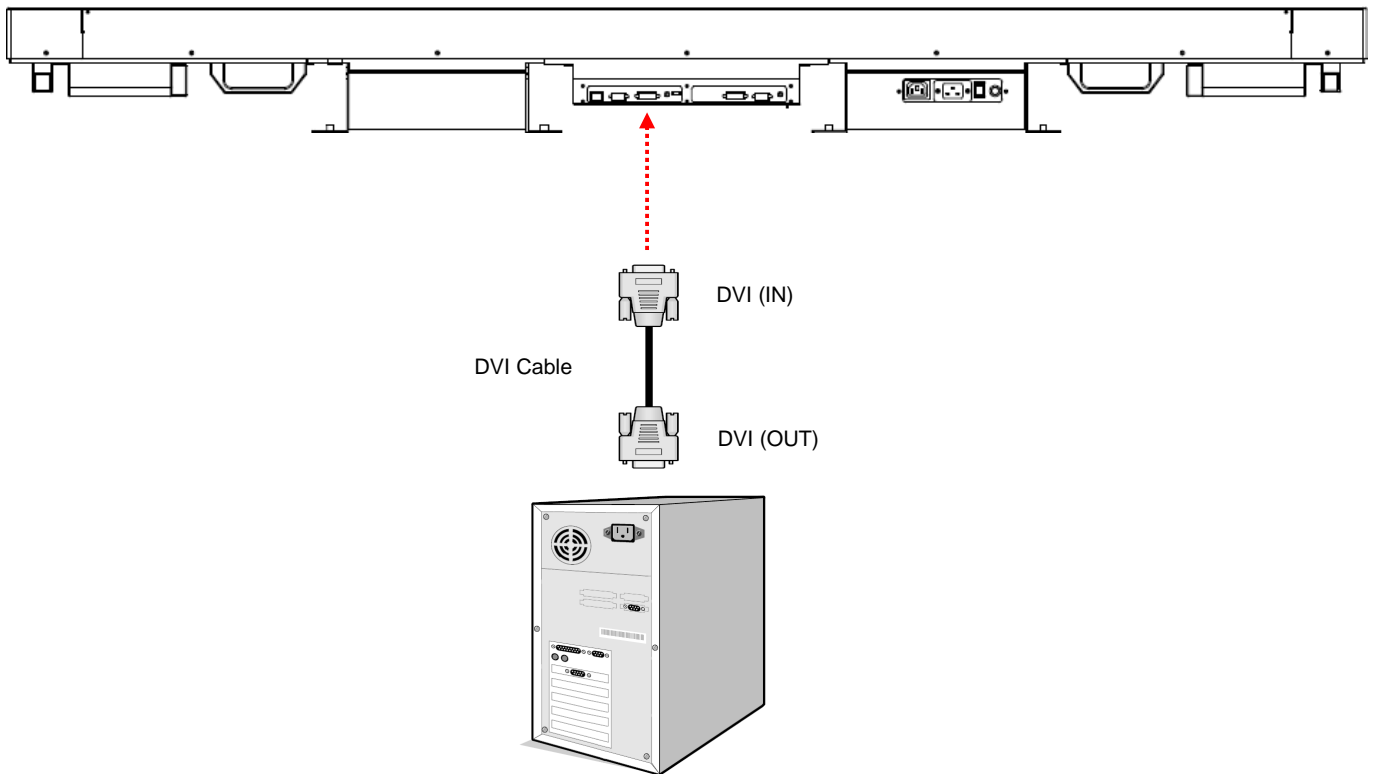

Connecting Multiple Displays for Video Wall Applications

To daisy chain multiple displays for a video wall application, connect a video source to the 1st display into the chain with the supplied DVI cable and RS-232 cable. Connect the DVI-OUT of the 1st display to the DVI-IN of the 2nd display. Using the RS-232 cable provided, connect the RS-232 OUT of the 1st display to the RS-232 IN of the 2nd display. Repeat connection for remaining displays. Use the OSD Menu or Display Manager software to configure the size of the video wall and the position of each display.

- Note:** The maximum number of DS841LR4's in a Video Wall is 36.
- Note:** The DynaScan "Display Manager" application is required to be installed on the PC in order to use the External Control feature.
- Note:** The Daisy Chain Setting (video wall function) only supports a resolution of 1920 x 1080 (1080p).

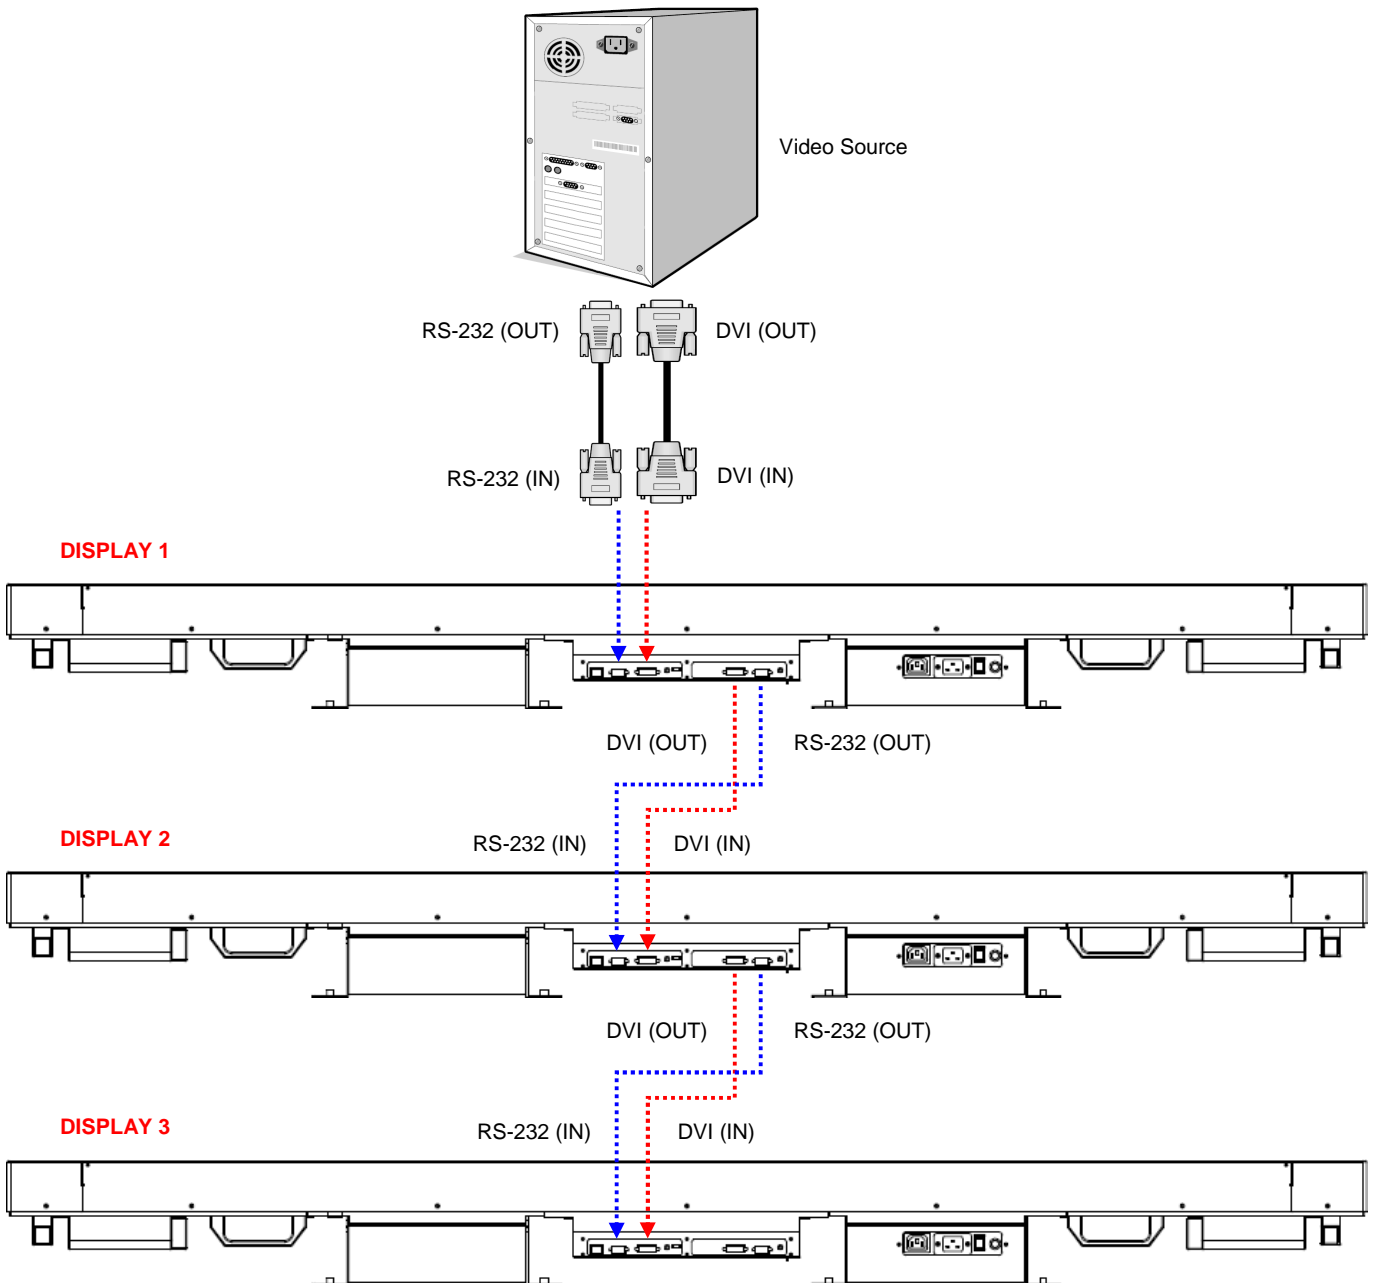


Connector Positions


| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ |
|-----------|-------------|----------|-----------|--------------|----------|---------|
| RJ-45(IN) | RS-232 (IN) | DVI (IN) | DVI (OUT) | RS-232 (OUT) | AC (OUT) | AC (IN) |

DS841LR4

Unit: mm

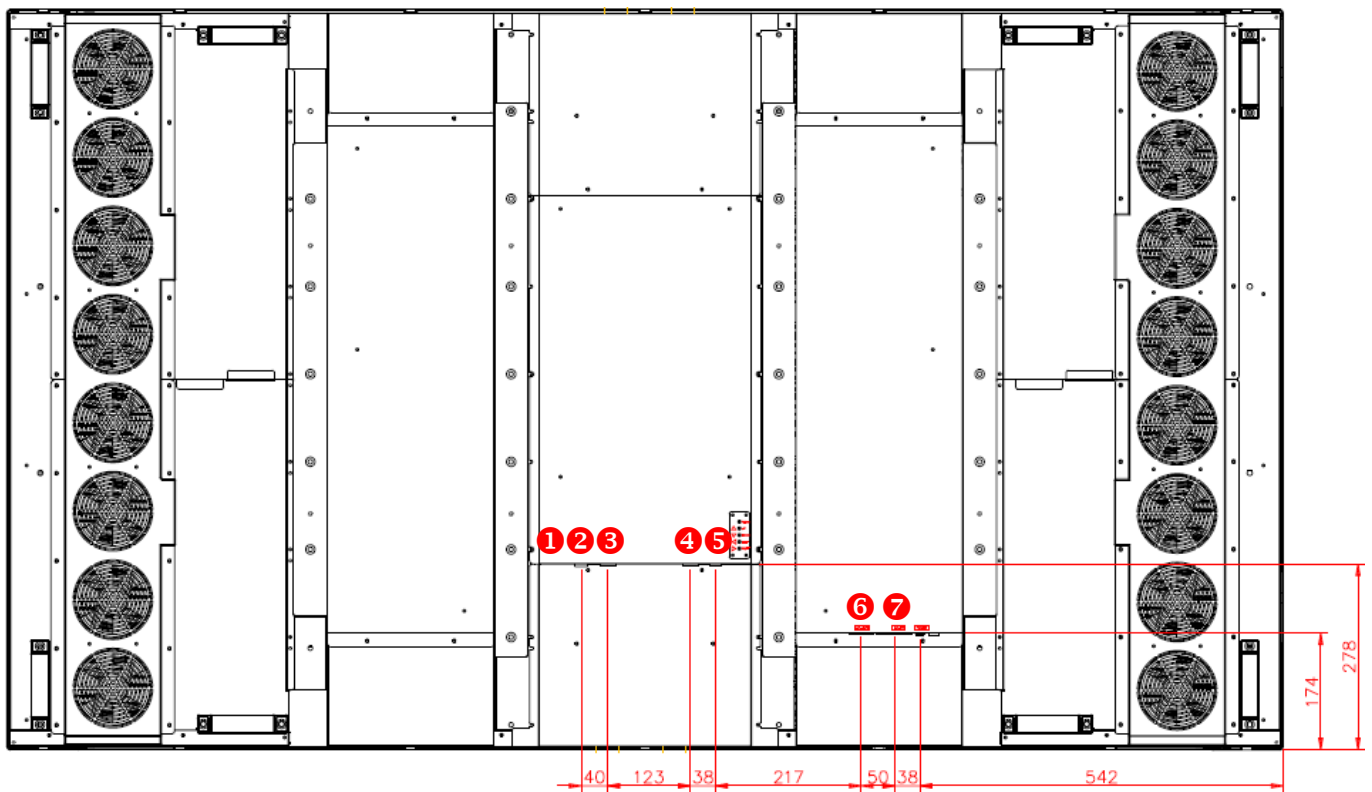

Input / Output Terminals

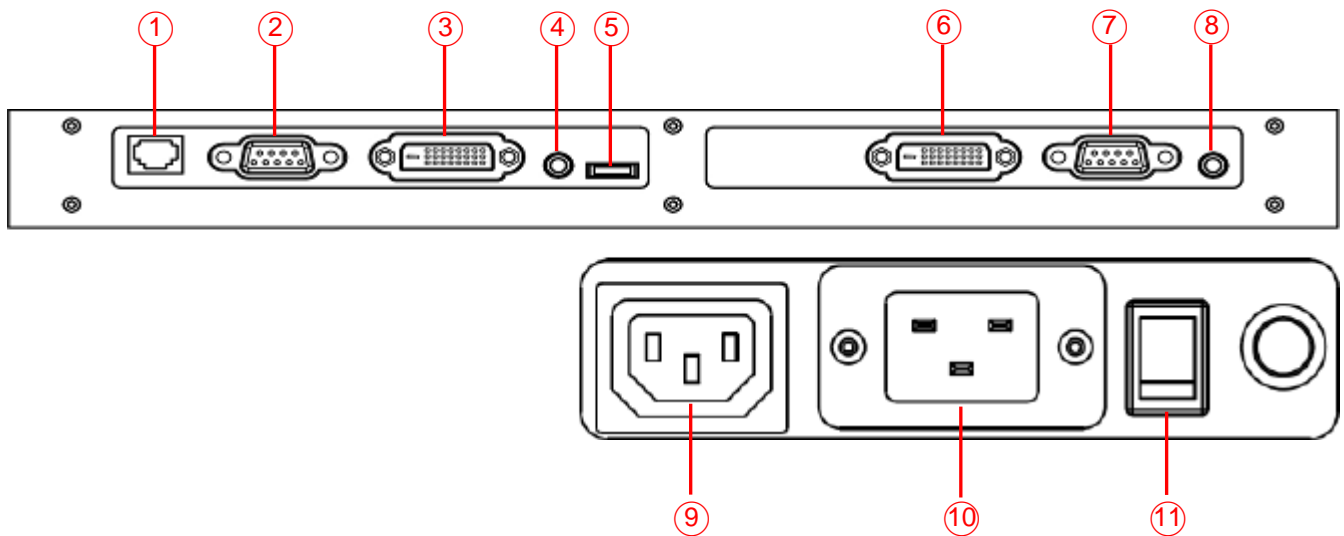


- ① **RJ-45 (IN):** RJ45 network input connection for the use of remote control from computer.
- ② **RS-232 (IN):** RS232C network input connection for the use of remote control from computer.
- ③ **DVI (IN):** Connect the DVI-D output of a PC, or the HDMI output of an AV device by using a DVI-HDMI cable.
- ④ **Audio (IN):** Connect audio input from external AV device.
- ⑤ **Extension Connector:** Extension Connector for optional IR Extension sensor kit (ESK201).
- ⑥ **DVI (OUT):** Output the signal from the DVI IN.
- ⑦ **RS-232 (OUT):** RS232 control function for the daisy chain application.
- ⑧ **Audio (OUT):** Connect the audio signal output from Audio IN jack to an external AV device.
- ⑨ **AC (OUT):** AC outlet 200~240V up to 100 Watt.
- ⑩ **AC (IN):** Connect the supplied power cord to the wall outlet.
- ⑪ **Power Switch:** Press to switch the main power on/off.

Operating Instructions

Powering On/Off the Display

To turn on/off the display, press the power switch on the back of the display as shown in the diagram below.

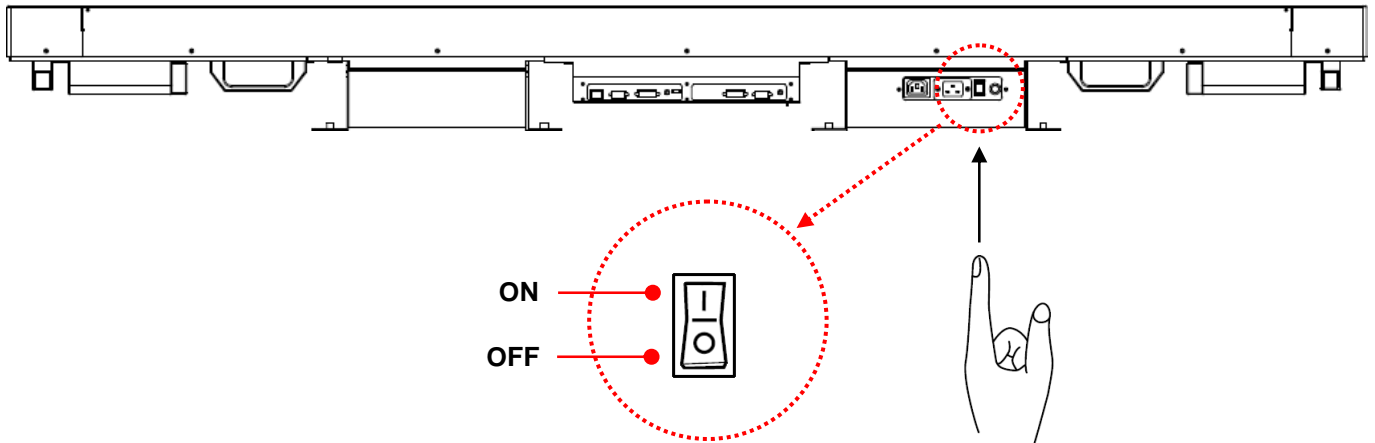

NOTE: the remote control only works when the main switch is in the ON position.


Using the Remote Control

When using the remote control, aim the remote at the IR receiver on the display. The IR receiver on the DS841LR4 model is at the front of the display with a receiving angle of 100 degrees. The IR receiver configurations of the model are shown in the figure below.


The operating range of the remote control is 2.5 meters (8 feet).

Ambient light may affect the performance of the remote control. Avoid fluorescent or neon lights in the vicinity.

DS841LR4

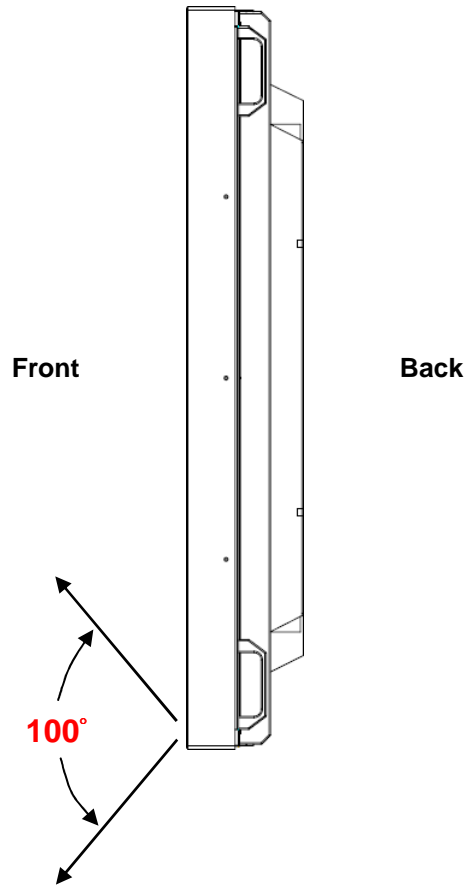



Using the Remote Control (cont.)

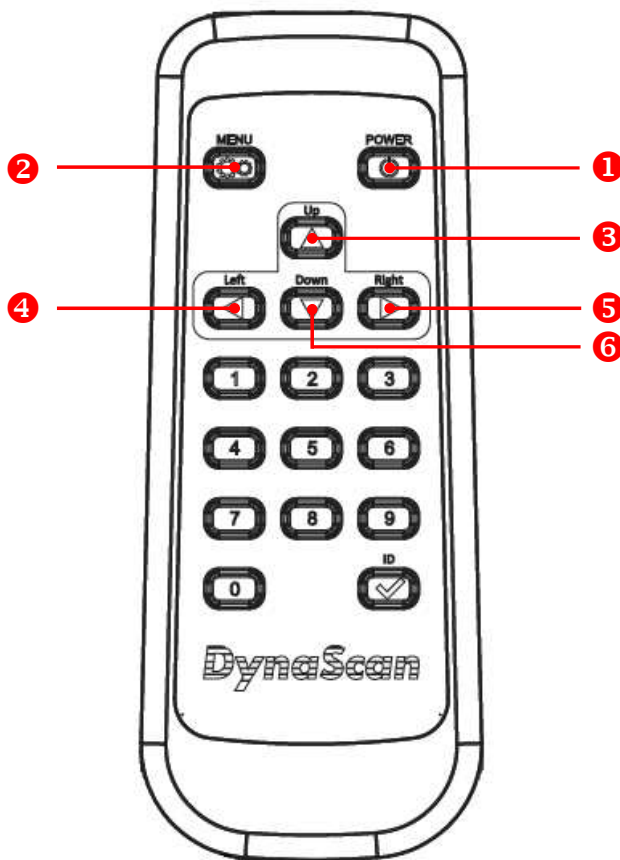

Color and shape may vary by model.

| ITEM | | DESCRIPTION |
|------|-------|---|
| 1 | POWER | Power On / Off |
| 2 | MENU | OSD On / Off |
| 3 | UP | Move the cursor up or change the setting of the selected item |
| 4 | LEFT | Exit the current selection |
| 5 | RIGHT | Select the highlighted item |
| 6 | DOWN | Move the cursor down or change the setting of the selected item |

Using the Rear Panel Controls

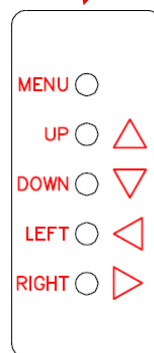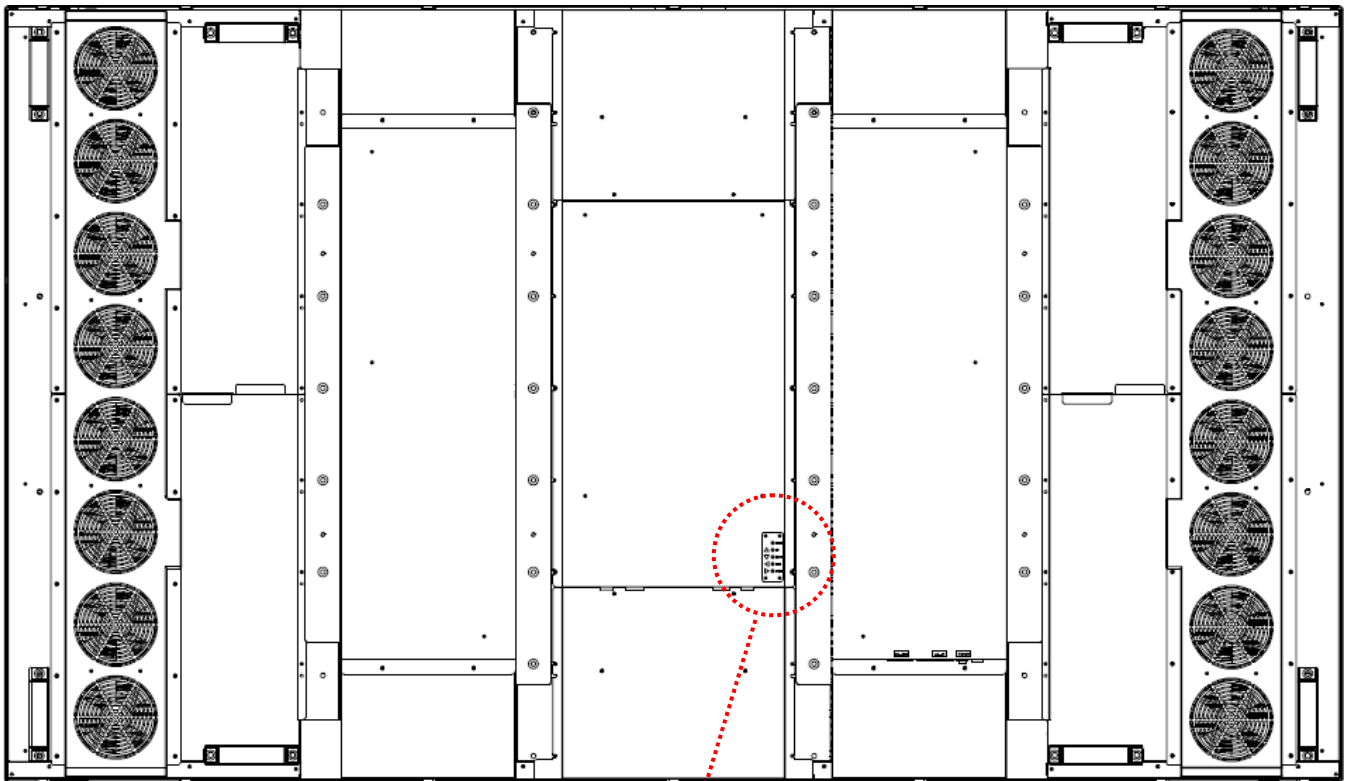

| ITEM | DESCRIPTION |
|-------|---|
| MENU | OSD On / Off |
| UP | Move the cursor up or change the setting of the selected item |
| DOWN | Move the cursor down or change the setting of the selected item |
| LEFT | Exit the current selection |
| RIGHT | Select the highlighted item |


Navigating the On Screen Display (OSD) Menu

Press the MENU button on either the real panel control or remote control to display the OSD. Use the navigation arrows to select and adjust menu items.

| ITEM 1 | ITEM 2 | DEFAULT | DESCRIPTION |
|------------|---------------------|---------|---|
| Picture | Color Temperature | D65 | Color temperature select (User, D93, D65 and D55). |
| | R | 100 | Adjust the red light level. Range 0 – 100. |
| | G | 100 | Adjust the green light level. Range 0 – 100. |
| | B | 100 | Adjust the blue light level. Range 0 – 100. |
| | Contrast | 50 | Adjust the contrast level. Range 0 – 100. |
| | Gamma | Native | Adjusts the Gamma value. |
| Time | Current Time | HH:MM | Set the clock. Note: The internal clock will continue to function when the power is turned off. |
| | Power Control Timer | Off | Turn on / off automatic power schedule function. |
| | Power On Time | HH:MM | Set turn-on time. |
| | Power Off Time | HH:MM | Set turn-off time. |
| Video Wall | Number of Rows | 1 | Set number of rows in video wall. Note: The maximum number of rows in a daisy chain is 15. |
| | Number of Columns | 1 | Set number of columns in video wall. Note: The maximum number of columns in a daisy chain is 15. |
| | Row Position | 1 | Vertical position in video wall. |
| | Column Position | 1 | Horizontal position in video wall. |
| | Bezel Compensation | On | Choose to turn the frame compensation function on or off. If turned on, the display will adjust the image to compensate for the width of display bezels in order to accurately display the image. |

| | | | |
|-----------|-----------------|---------------|--|
| Backlight | Auto Brightness | Off | To turn On / Off the auto brightness adjustment. Note: With AUTO BRIGHTNESS off, the screen brightness will remain at HIGH LEVEL brightness value. With AUTO BRIGHTNESS on (Auto), the display brightness adjusts according to the ambient light. When ambient light is bright, the screen will adjust to the set HIGH LEVEL brightness value; when ambient light is dark, the screen will adjust to the set LOW LEVEL brightness value. When the Timer mode is set, the display will automatically switch the brightness according to the set time. |
| | High Level | 100 | Adjusts the highest brightness level. Range 0 – 100. |
| | Low Level | 50 | Adjusts the lowest brightness level. Range 0 – 100. |
| | High Level Time | HH:MM | Set high level time. |
| | Low Level Time | HH:MM | Set low level time. |
| | Local Dimming | High | Adjusts the contrast. High is the highest contrast. Off is the lowest contrast. |
| Network | DHCP | On | Choose to enable or disable the DHCP function. If enabled, the display will be assigned IP address, Subnet mask and Default gateway automatically. If disabled, you will be prompted to enter the following value manually. |
| | IP | 192.168.0.100 | Assign IP address. |
| | Mask | 255.255.255.0 | Assign Subnet mask. |
| | Gateway | 192.168.0.1 | Assign Default gateway. |


| | | | |
|---------------|--------------------------|-----------|--|
| Advance | Display Mode | Landscape | Change the orientation of the Menu. The Menu can be displayed in either LANDSCAPE or PORTRAIT mode. |
| | Screen Saver | Off | Turn on / off image burn-in protection. Sets image burn-in protection interval. |
| | Remote Control | RS232 | Choose to use the remote control function RS232 or Network. |
| | IR Control | On | Enables / disables the ability to use the remote to control the Menu. Note: When disabled, the remote control function can be enabled again from the control panel on the display or through the DynaScan "Display Manager" application. |
| | Power Off Mode | Standby | When in Power Off Mode, RS-232 controls do not function. Only [Main Power Switch] on the display or [Power Button] on the remote controller can wake up the display. |
| | Reset to Default Setting | Off | Restores all settings to default. Note: Does not modify CURRENT TIME, POWER ON TIME, POWER OFF TIME. |
| Information | Resolution | 1920x1080 | Input resolution. |
| | Model | DS841LR4 | The display's model. |
| | Serial Number | | The display's serial number. |
| Engineer Mode | Hardware | | The H/W version. |
| | Firmware | | The F/W version. |


 Some functions may not be available for all models.

*Adjusted value: Each R/G/B value for this product has been individually adjusted in during production to a preset color temperature of 6500K.

Specifications

| MODEL | | DS841LR4 |
|------------------|--------------------------------------|---|
| PANEL | LCD Panel Size | 84.04 inches |
| | Native Resolution | 1920 x 1080 |
| | Brightness | 2500 cd/m ² (Typ.) |
| | Contrast Ratio | 3,000:1 (Static) 1,000,000:1 (Dynamic) |
| | Response Time | 12 ms (Typ.) |
| | Viewing Angle | 178° / 178° |
| | Life Time | 50,000 hrs (Typ.) |
| | Panel Surface | AG, 3H |
| POWER | Power Supply | Internal |
| | Rated Voltage | 200 ~ 240V, 50 / 60Hz |
| | Power On Mode | Max. 2000W |
| | Standby Mode | < 1W |
| | AC Out | < 100W |
| MECHANICAL SPECS | Bezel Width (T/B/L/R) | 26/26/20/20 mm |
| | Cabinet Color | Black |
| | Monitor Dimension (LxHxD, w/o Stand) | 1907 x 1105 x 173.5 mm |
| | Monitor Weight (set / package) | 115 kg / 135 kg |
| | VESA Mounting (Dimension) | 8 Holes (400x400 mm, 1000x400 mm) |
| USER INTERFACE | OSD Language | English |
| ENVIRONMENT | Operation Temperature | 0 °C ~ 40 °C |
| | Storage Temperature | -20 °C ~ 60 °C |
| | Humidity | 10%~80% RH Non-Condensing |
| I/O Ports | DVI-D | IN *1 / OUT *1 (support HDMI/HDCP) |
| | RS-232 | IN *1 / OUT *1 |
| | RJ-45 | IN *1 |
| | Audio | IN *1 / OUT *1 |

 Design and specifications are subject to change without notice.

 DVI-D out only supported resolution is 1920 x 1080 (1080p).


Input Mode

| Active Resolution | | Refresh Rate | Pixel Rate | Aspect Ratio |
|-------------------|---------|--------------|------------|--------------|
| H Pixels | V Lines | | | |
| 640 | 480 | 60 Hz | 25.175 MHz | 4:3 |
| 720 | 480 | 50 Hz | 27 MHz | 4:3 |
| | | 59.94 Hz | 27 MHz | 4:3 |
| 800 | 600 | 60 Hz | 40 MHz | 4:3 |
| 1024 | 768 | 60 Hz | 65 MHz | 4:3 |
| 1280 | 720 | 50 Hz | 74.25 MHz | 16:9 |
| | | 60 Hz | | |
| 1280 | 768 | 60 Hz | 79.5 MHz | 5:3 |
| 1360 | 768 | 60 Hz | 85.5 MHz | 16:9 |
| 1920 | 1080 | 50 Hz | 148.5 MHz | 16:9 |
| | | 60 Hz | | |

Pin Assignments

Digital RGB Output (DVI-D): DVI

| PIN ASSIGNMENT OF DVI CONNECTOR | | | | | |
|---------------------------------|--------------------|----|--------------------|----|--------------------|
| 01 | TX2- | 09 | TX1- | 17 | TX0- |
| 02 | TX2+ | 10 | TX1+ | 18 | TX0+ |
| 03 | Shield (TX2 / TX4) | 11 | Shield (TX1 / TX3) | 19 | Shield (TX0 / TX5) |
| 04 | NC | 12 | NC | 20 | NC |
| 05 | NC | 13 | NC | 21 | NC |
| 06 | DDC-Serial Clock | 14 | +5V power | 22 | Shield (TXC) |
| 07 | DDC-Serial Data | 15 | Ground | 23 | TXC+ |
| 08 | NC | 16 | Hot plug detect | 24 | TXC- |

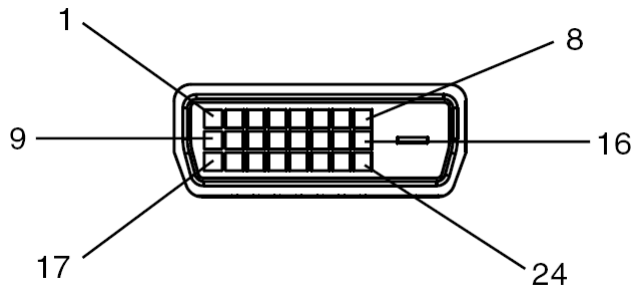


Digital RGB Input (DVI-D): DVI

| PIN ASSIGNMENT OF DVI CONNECTOR | | | | | |
|---------------------------------|--------------------|----|--------------------|----|--------------------|
| 01 | RX2- | 09 | RX1- | 17 | RX0- |
| 02 | RX2+ | 10 | RX1+ | 18 | RX0+ |
| 03 | Shield (RX2 / RX4) | 11 | Shield (RX1 / RX3) | 19 | Shield (RX0 / RX5) |
| 04 | NC | 12 | NC | 20 | NC |
| 05 | NC | 13 | NC | 21 | NC |
| 06 | DDC-Serial Clock | 14 | +5V power | 22 | Shield (RXC) |
| 07 | DDC-Serial Data | 15 | Ground | 23 | RXC+ |
| 08 | NC | 16 | Hot plug detect | 24 | RXC- |

RS-232 Output

| PIN No. | NAME |
|---------|------------------|
| 01 | connected to 7&8 |
| 02 | RXD |
| 03 | TXD |
| 04 | connected to 6 |
| 05 | GND |
| 06 | connected to 4 |
| 07 | connected to 1&8 |
| 08 | connected to 1&7 |
| 09 | NC |

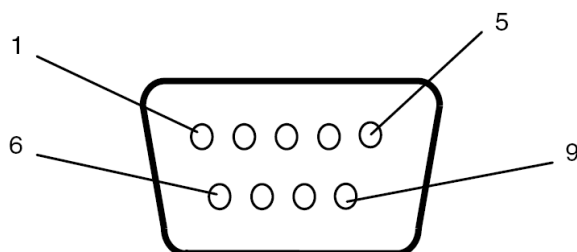

RS-232 Input

| PIN No. | NAME |
|---------|------------------|
| 01 | connected to 7&8 |
| 02 | TXD |
| 03 | RXD |
| 04 | connected to 6 |
| 05 | GND |
| 06 | connected to 4 |
| 07 | connected to 1&8 |
| 08 | connected to 1&7 |
| 09 | NC |

Troubleshooting

| ISSUE | RECOMMENDED SOLUTION |
|--|---|
| No image is displayed. | <ul style="list-style-type: none"> • Check whether the DVI in cable is completely plugged in. • Check whether the main switch is in the ON position, and the power cord is completely plugged in. • Check whether the image source's resolution is set to 1920 × 1080 (1080p). • Check whether the DVI cable is damaged or bent excessively. |
| Nothing happens when switching the main switch on. | <ul style="list-style-type: none"> • Unplug the power cord from the socket and plug it back in after a few seconds to reset the Signage. <p>Note: Unplugging the power cord will not change the settings.</p> |
| Image is unstable. | <ul style="list-style-type: none"> • Check whether the DVI in cable is completely plugged in. |
| The remote control does not work. | <ul style="list-style-type: none"> • Check whether there are batteries in the remote control. • Check the batteries for freshness, polarity, etc. • Check whether the remote is in the operation range. • Bright light may interfere with the remote control. Please avoid using the remote control near special fluorescent lights or neon lights. |
| Auto on/off does not work or does not function properly. | <ul style="list-style-type: none"> • Check whether the TIMER setting in the menu is set to "OFF". • Check whether the "Power On Time" and "Power Off Time" settings are set correctly. |
| Cannot control the display remotely via RS-232. | <ul style="list-style-type: none"> • Check whether the RS-232 cable is connected properly. |

If you are still having trouble with your DynaScan DS² Professional LCD, contact your dealer or DynaScan directly for more assistance.

Recycling and Energy Information

DynaScan is firmly committed to its environmental protection efforts and we believe that reducing our products' impact on the environment is of the utmost importance. We are dedicated to meet the latest environmental protection regulations.

Energy usage

| Mode | Energy consumption |
|---------|--------------------|
| Normal | Max. 2000 W |
| Standby | < 1 W |

Disposal

Do not dispose of electrical appliances as unsorted municipal waste, use separate collection facilities. Contact your local government for information regarding the collection systems available. If electrical appliances are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being. When replacing old appliances with new one, the retailer is legally obligated to take back your old appliances for disposal at least for free of charge.



Material Contents Declaration

| Part Name | Hazardous Substances | | | | | |
|------------------|----------------------|---------|---------|---------------------|--------------------------|--------------------------|
| | Lead | Mercury | Cadmium | Hexavalent Chromium | Polybrominated Biphenyls | Polybromodiphenyl Ethers |
| | Pb | Hg | Cd | Cr ⁶⁺ | PBB | PBDE |
| PCBA | ○ | ○ | ○ | ○ | ○ | ○ |
| CHASSIS | ○ | ○ | ○ | ○ | ○ | ○ |
| ACCESSORY | ○ | ○ | ○ | ○ | ○ | ○ |
| PACKAGE | ○ | ○ | ○ | ○ | ○ | ○ |

“○” indicates that the level of the specified chemical substance is less than the threshold level specified in the standards of SJ/T-11363-2006 and EU 2005/618/EC.

“×” indicates that the level of the specified chemical substance exceeds the threshold level specified in the standards of SJ/T-11363-2006 and EU 2005/618/EC.

Limited Warranty

WARRANTY COVERAGE

DynaScan's warranty obligations are limited to the terms set forth below: DynaScan warrants its product against defects in materials and workmanship for a period of TWO (2) YEARS from the date of initial installation. If a defect exists, DynaScan will repair the product at no charge. A replacement part assumes the remaining warranty of the original product or NINETY (90) DAYS from the date of replacement or repair, whichever provides longer coverage for you. When a part is exchanged, any replacement item becomes your property and the replaced item becomes DynaScan's property.

OBTAINING WARRANTY SERVICE

You must contact DynaScan, identify the unit by model number, serial number and date of purchase, and furnish a brief description of the problem.

EXCLUSIONS AND LIMITATIONS

This Limited Warranty applies only to products manufactured by DynaScan that can be identified by the "DynaScan" trademark, trade name, or logo affixed to them. The Limited Warranty does not apply to any non-DynaScan products or any software, even if packaged or sold with DynaScan hardware. Non-DynaScan manufacturers, suppliers, or publishers may provide their own warranties. DynaScan and its Authorized Service Providers are not liable for any damage to or loss of data or other information stored on any media, or any non-DynaScan product or part not covered by this warranty. This warranty does not apply: (a) to damage caused by natural disasters, accident, abuse, misuse, misapplication, neglect; (b) to damage caused by service, including upgrades and expansions, performed by anyone who is not a DynaScan Authorized Service Provider; (c) to a product or a part that has been modified without the written permission of DynaScan; or (d) if any DynaScan serial number has been removed or defaced.

THIS WARRANTY AND REMEDIES SET FORTH ABOVE ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, REMEDIES AND CONDITIONS, WHETHER ORAL OR WRITTEN, EXPRESS OR IMPLIED. DYNASCAN SPECIFICALLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. IF DYNASCAN CANNOT LAWFULLY DISCLAIM IMPLIED WARRANTIES UNDER THIS LIMITED WARRANTY, ALL SUCH WARRANTIES, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY. No DynaScan reseller, agent, or employee is authorized to make any modification, extension, or addition to this warranty.

DYNASCAN IS NOT RESPONSIBLE FOR DIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF WARRANTY OR CONDITION, OR UNDER ANY OTHER LEGAL THEORY, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DOWNTIME, GOODWILL, DAMAGE TO OR REPLACEMENT OF EQUIPMENT AND PROPERTY, ANY COSTS OF RECOVERING OR REPRODUCING ANY

PROGRAM OR DATA STORED IN OR USED WITH DYNASCAN PRODUCTS, AND ANY FAILURE TO MAINTAIN THE CONFIDENTIALITY OF DATA STORED ON THE PRODUCT. DYNASCAN SPECIFICALLY DOES NOT REPRESENT THAT IT WILL BE ABLE TO REPAIR ANY PRODUCT UNDER THIS WARRANTY OR MAKE A PRODUCT EXCHANGE WITHOUT RISK TO OR LOSS OF PROGRAMS OR DATA.

www.dynascanusa.com